




Single Phase Centrifugal Shallow Well Jet Monobloc Pumpset

► SHCS - SJ

SELF PRIMING | HIGH SPEED

Parameters	Range
Power Range	0.5 - 1.0 HP
Head Range	16 - 35 m
Discharge Range	16 - 42 lpm

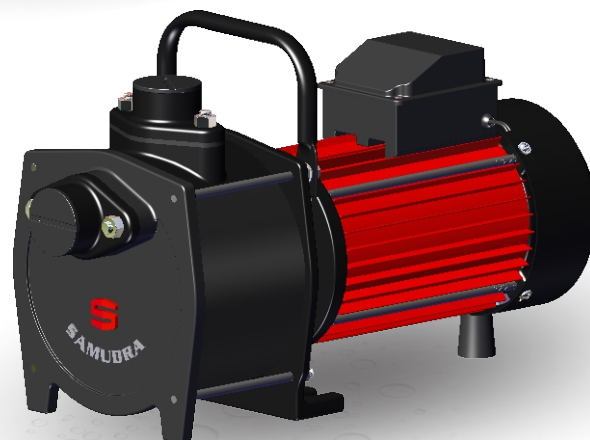

Salient Features

- In- built jet unit
- Single phase TEFC construction
- Carbon Vs Ceramic mechanical seal
- High efficiency with wide operating range 180 to 240 voltage
- Available both in cast iron and Stainless steel Delivery chamber

Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total Suction head up to 7 mtrs Continuous duty

Application

- Small Pressure Boosting applications
- Applications, requiring self-priming action
- Water circulating systems. Fountain, Lawns and Gardens
- Lifting water from sump to overhead tanks for domestic, Individual houses and apartments