




# Single Phase Self Priming High Speed Monobloc Pumpset

► SRH

SELF PRIMING | HIGH SPEED

Parameters	Range
Power Range	0.5 - 1.0 HP
Head Range	6 - 40 m
Discharge Range	20 - 60 lpm

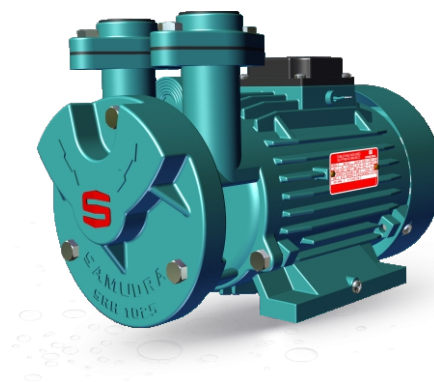

## Salient Features

- Carbon Vs Ceramic mechanical seal
- Superior grade rigid cast iron construction
- High wear resisting impeller (High tensile bronze)
- Wide Voltage Band, 180v to 240v, 50Hz single phase supply

## Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total Suction head up to 7 mtrs Continuous duty

## Application

- Small Pressure Boosting applications
- Applications, requiring self-priming action
- Water circulating systems. Fountain, Lawns and Gardens
- Lifting water from sump to overhead tanks for domestic, Individual houses and apartments

\*As the design and manufacture of Samudra pumps are subject to constant improvement, the product supplied may differ in some details from the specification given.

**SAMUDRA PUMPS (INDIA) PVT LTD**

Registered Office : Office Block 1, Ground Floor, Senthil Towers, 1078 Avinashi Road, Coimbatore - 641 018, TN, India | Tel. +91 422 498 22 55

Email: [info@samudrapumps.com](mailto:info@samudrapumps.com) | [www.samudrapumps.com](http://www.samudrapumps.com) | CIN : U31909TZ2020FTC033500